

PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS TEST REPORT

SCOPE OF WORK

FM 4473 IMPACT RESISTANCE TESTING OF IBERIA ROOF TILE

REPORT NUMBER

P5633.01-801-44 R1

TEST DATE(S)

12/20/22

ISSUE DATE

03/13/23

REVISION DATE

03/15/23


PAGES

10

DOCUMENT CONTROL NUMBER

RT-R-AMER-Test-2957 (11/28/22)

© 2017 INTERTEK

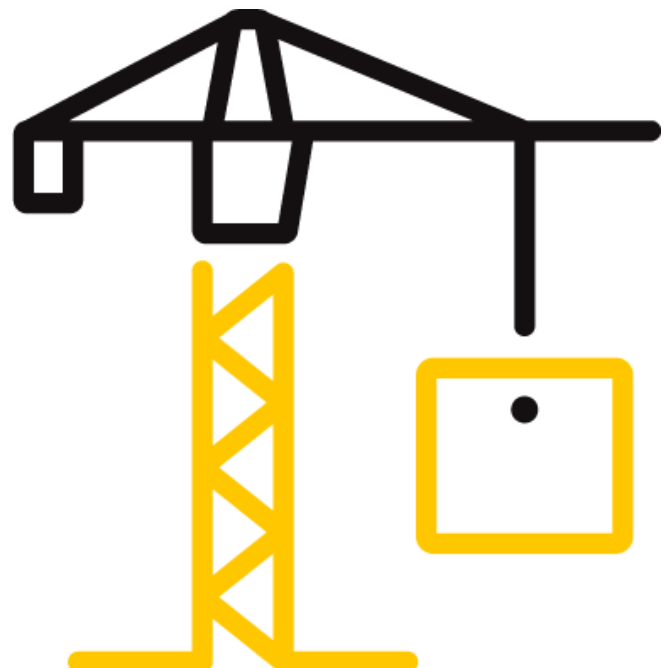

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

REPORT ISSUED TO

PRESAJET SAPI DE CV DBA CROWN ROOF TILES

Planta Garcia
Carretera a Villa de Garcia km. 11.8
Garcia, Nuevo León, México 66001

SECTION 1

SCOPE

Architectural Testing, Inc. (an Intertek company) dba Intertek Building & Construction (B&C) was contracted by Crown Roof Tiles to perform impact resistance testing in accordance with FM 4473 on their Iberia Roof Tile. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted at Intertek B&C test facility in Plano, Texas

Unless differently required, Intertek reports apply the "Simple Acceptance" rule also called "Shared Risk approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. Intertek B&C will service this report for the entire test record retention period. The test record retention period ends four years after the test date. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained for the entire test record retention period.

SECTION 2

SUMMARY OF TEST RESULTS

Product Type: Roof Tile
Series/Model: Iberia
Product Classification Achieved: Class 3

For INTERTEK B&C:

COMPLETED BY: Lucio "Fred" Muñoz
TITLE: Project Manager

SIGNATURE:
DATE: 03/15/23

REVIEWED BY: Jeff Crump, FMPC
TITLE: Lab Manager

SIGNATURE:
DATE: 03/15/23

LFM:jc/cm

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

SECTION 3 TEST METHOD(S)

The specimens were evaluated in accordance with the following:

ANSI/FM 4473-2011 (R2020), *American National Standard for Impact Resistance Testing of Rigid Roofing Materials by Impacting with Freezer Ice*

SECTION 4 MATERIAL SOURCE/INSTALLATION

Test specimens were provided by the client. Representative samples of the test specimen(s) will be retained by Intertek B&C for a minimum of four years from the test completion date.

Installation of the tested product was performed by Intertek Building & Construction (B&C). 1x2 wood battens were secured to the deck with #8 x 2-1/2" wood screws located on 18" centers. Battens were spaced 14" on center from the bottom. Tiles were placed on the battens in overlapped weatherboard fashion and secured with #8 x 2-1/2" located in one nail hole. Tiles overlapped 3" at the bottom and 1" at the sides.

SECTION 5 EQUIPMENT

Cannon: Constructed from steel piping utilizing compressed air to propel the missile

Missile: 44.5 mm (1-3/4") diameter ice balls

Cannon Identification Number: 005469

Timing Device: Electronic Beam Type

Timing Device Calibration Date: 06/21/22

SECTION 6 LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Tim Lastovica	Crown Roof Tiles
Fred Muñoz	Intertek B&C

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

SECTION 7

TEST SPECIMEN DESCRIPTION

Tile Description: Roofing Tile

Individual Tile Weight: 5193.6 g (11.45 lb)

Individual Tile Size: 330 mm (13") width by 438 mm (17-1/4") length

Exposed Tile Size: 305 mm (12") width by 349 mm (13-3/4") length

Number of Tiles: 3 width by 3 length

Deck Construction

The wood test deck was 3' wide x 4' high and constructed with 2x4 pine construction lumber at the perimeter with one stud located at the midspan. The test deck was covered with 15/32" thick plywood decking secured to the test deck with #6 x 1-5/8" screws located 2" from each end and on 6" centers.

Clips: No clips were utilized.

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

Date: 03/13/23

**SECTION 8
TEST RESULTS**

FM 4473, Ice Ball Impact Resistance

Sample Conditioning Temperature: 19°C (66°F) for at least 4 hours

Sample Conditioning Relative Humidity: 69% for at least 4 hours

Ice Ball Conditioning Temperature: -22°C (-7°F) for at least 48 hours

Muzzle Distance from Test Specimen: 914 mm (36")

The ambient temperature during testing was 20°C (68°F). The results are tabulated as follows.

Test Unit #1

IMPACT	MISSILE					IMPACT AREA	OBSERVATIONS	RESULTS
	VELOCITY m/s (fps)	ORIENTATION	WEIGHT g (lbs)	DIAMETER mm (in.)	ENERGY ft-lb			
1	31.2 (102.4)	15° of vertical	42.8 (0.094)	44.5 (1.75)	15.38	Bottom left corner, 2" from bottom	No visible cracking or breakage	Pass
2	30.1 (98.6)	15° of vertical	42.1 (0.093)	44.5 (1.75)	14.02	Bottom left corner, 2" from bottom	No visible cracking or breakage	Pass
3	30.7 (100.8)	15° of vertical	42.1 (0.093)	44.5 (1.75)	14.66	Center, 8" from bottom	No visible cracking or breakage	Pass
4	31.5 (103.3)	15° of vertical	42.1 (0.093)	44.5 (1.75)	15.39	Center, 8" from bottom	No visible cracking or breakage	Pass
5	30.1 (98.6)	15° of vertical	42.1 (0.093)	44.5 (1.75)	14.02	Bottom right corner, 2" from bottom	No visible cracking or breakage	Pass
6	30.1 (98.6)	15° of vertical	42.1 (0.093)	44.5 (1.75)	14.02	Bottom right corner, 2" from bottom	No visible cracking or breakage	Pass

**TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING
PRODUCTS**

Report No.: P5633.01-801-44 R1

Date: 03/13/23

SECTION 9

CONCLUSION

The sample tested met the performance requirements set forth in the referenced test procedures for a Class 3.

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

SECTION 10
PHOTOGRAPHS



Photo No. 1
Test Deck, Overall View

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1



Photo No. 2
Impact Tile, Front View

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1



Photo No. 3
Impact Tile, Rear View



Total Quality. Assured.

1909 10th Street, Suite 100
Plano, Texas 75074

Telephone: 469-814-0687
www.intertek.com/building

TEST REPORT FOR PRESAJET SAPI DE CV DBA CROWN BUILDING PRODUCTS

Report No.: P5633.01-801-44 R1

**SECTION 11
REVISION LOG**

REVISION #	DATE	PAGES	REVISION
0	03/13/23	N/A	Original Report Issue
1	03/15/23	All	Updated client name and address