




Easy Form Plus®

Universal Flashing with extra metal grid

Easy Form Plus® is a lightweight, environment friendly universal flashing that can be used for the sealing of almost any part of the roof. The material is flexible up to 30% due to its creped paintable aluminum surface composite. It comes with an extra metal grid that molds easily to the contours of the roof and walls and is particularly effective on corners. The butyl underside makes it very durable and it does not suffer from wind uplift.

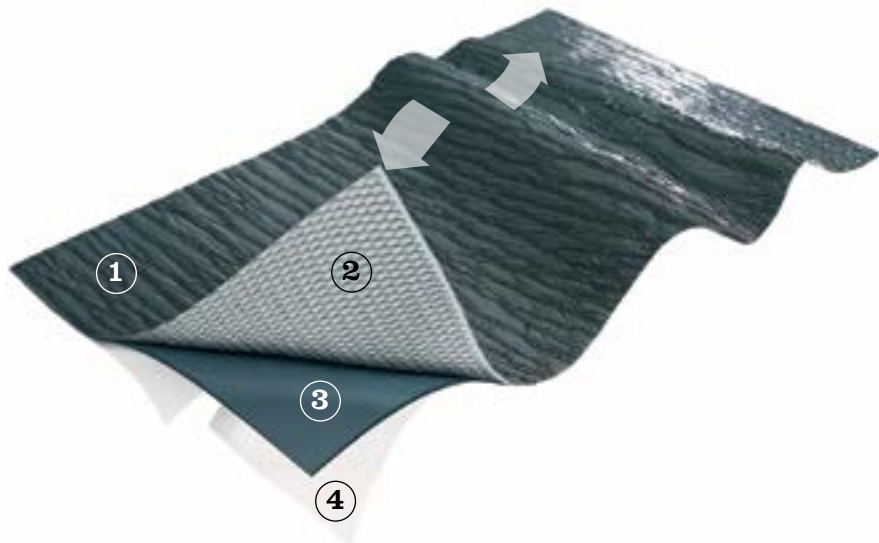

1. Paintable creped aluminium composite
2. Metal grid
3. Butylon backing
4. Release paper - divided in two strips








The choice is yours!

Easy Form Plus® is a safe, lead-free product, that is easier to use and less expensive than lead and it provides superior performance. Simply cut and form to size needed and it's ready to be installed directly on the roof.



Min roof pitch	≥10° or 2/12
Resistance	Does not rot, is weather-resistant, resistant to frost, aging & changes in temperature
Temperature resistance	-68° to +176° F
Installation temperature	+41° to +104° F
Butyl adhesive	Should be applied to suitable surfaces only, which are dry & dust free
UV stability	UV stable due to metallic upper surface
Thickness	1.2 mm
Water column	Watertight

Product Features & Benefits

-  Highly durable UV resistant metallic surface gives similar expected lifespan to lead and zinc.
-  Self-fixing to itself or onto dry, dust-free surfaces via an all across adhesive butyl lamination.
-  The fully adhered butyl underside makes it very durable and does not suffer from wind uplift.
-  Split Release paper allows for easy and precise installation
-  Universal – flexible material suitable for all clay/concrete tiles and flat slate products
-  Easy to form even in complex surfaces and can stretch up to 30% in dimensions
-  Easier to form, lighter, and less expensive than lead
-  Highly resistant to UV Rays, high temperatures, rain, snow, dust, and to constant exposure to the elements.
-  Environment friendly, safe lead-free product

Material

Paintable creped aluminum composite, Metal grid, butylon backing, complete coating with self-adhesive butyl, and plastic release paper

Color

Black (Paintable surface)

Dimensions

12 in. (300mm) x 33 ft. (10m)
24 in. (600mm) x 16.5 ft. (5m)

Weight (lbs)

Product	Roll	Box	Pallet
12 in.	13.2	27.5	710
24 in.	13.2	27.5	600

Packaging (rolls)

Product	Box	Pallet
12 in.	2	48 (24 Boxes)
24 in.	2	40 (20 Boxes)

Product Codes

12 in. (300mm) – MC022
24 in. (600mm) – MC023

Installation

- Easy Form Plus® can be worked and laid to professional standards with ordinary tools – simply cut the material, shape it, and install it on the roof.
- The rolls come with a split release paper that allows for easier and more precise installation.
- Due to its flexible structure and its stretching properties (up to 30%) it is easy to form on any given shape or surface.
- The creped aluminum surface comes with a black color that can be painted to match roof colors.

Applications

- Easy Form Plus® is suitable for all abutments at walls, chimneys, vents, sidewalls, gables, hip and ridge areas, valleys, repairs, and for complex transitions on the roof.
- New or reroof projects
- All flat and profiled roofing materials.



Certifications



Contact Information

TEXAS

Crown Building Products, LLC
2155 FM 1187
Mansfield, Texas
USA. 76063
Tel: 817.225.6112 Fax: 817.225.6118

FLORIDA

6018 SW Highway 72
Arcadia, Florida
USA. 34266
Tel: 863.993.4004 Fax: 863.993.4008

www.crownrooftiles.com

Universal Flashing | Easy Form Plus®



Easy Form Plus® is a highly flexible, lightweight and environment friendly universal flashing

